



Pannello in metacrilato trasparente antibatterico sp.4 mm.


Maniglia 130x30 mm.

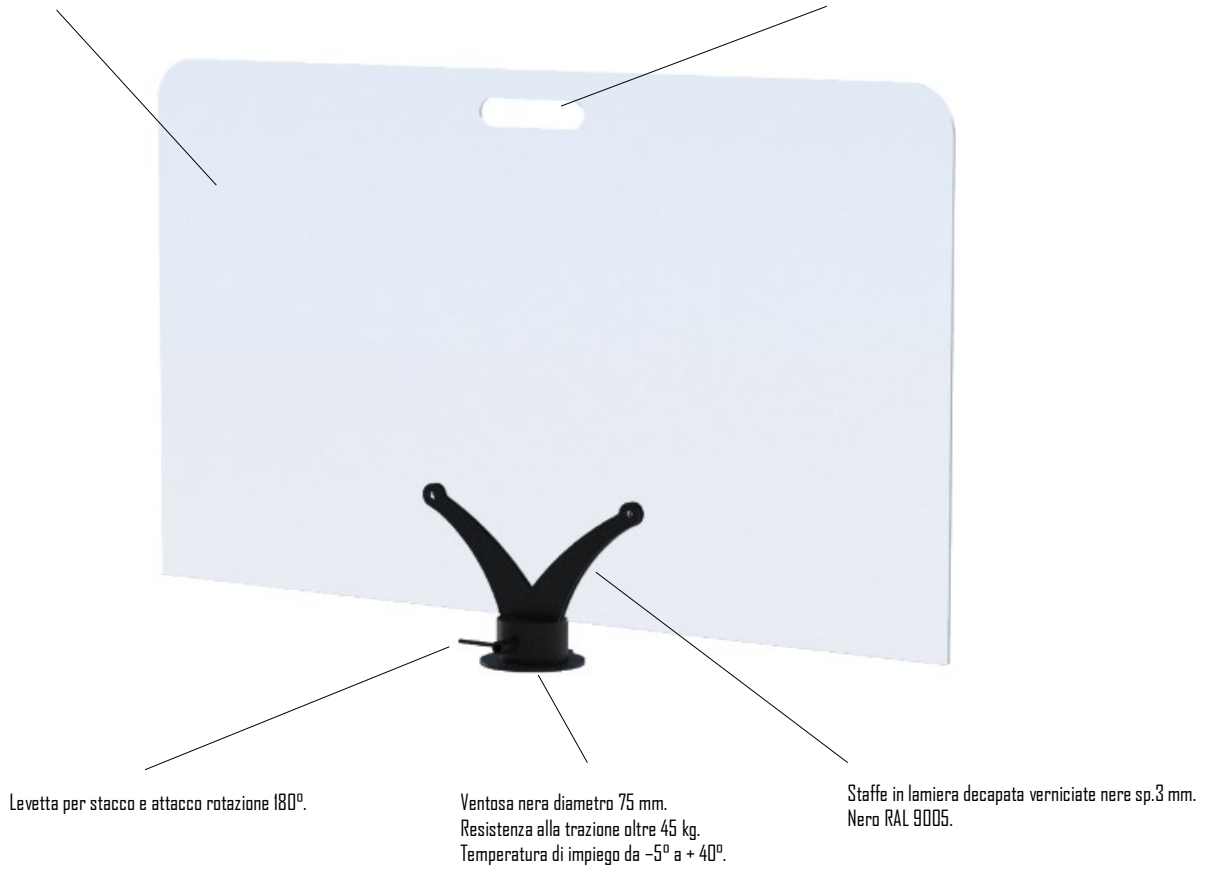

TIE 80

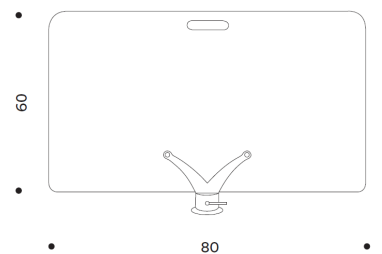


TIE 100

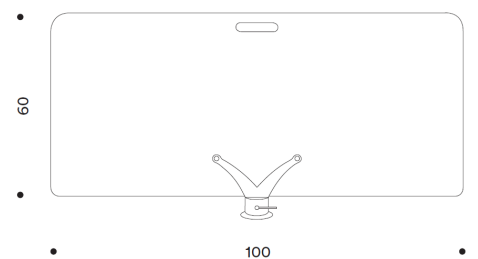

Transparent antibacterial methacrylate partition panel th. 4 mm.

Handle 130x30 mm.

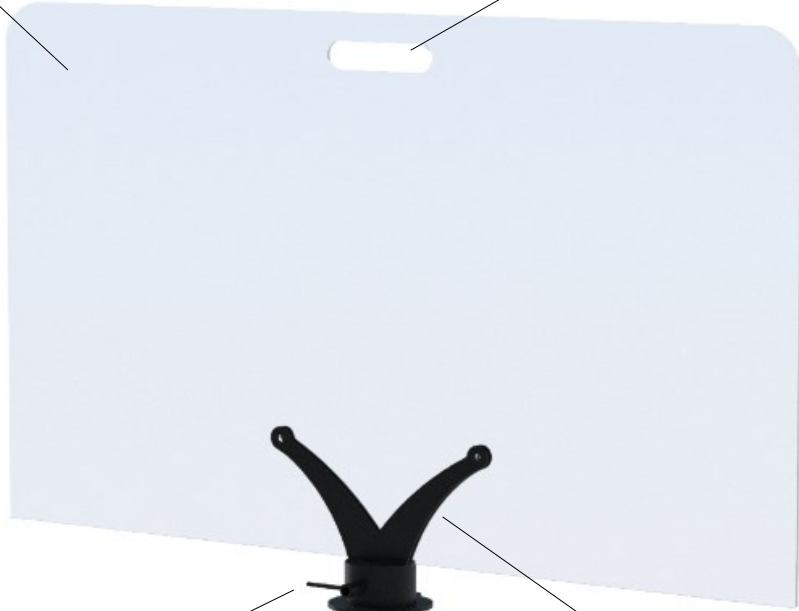


Lever for detachment and rotation attachment

Black suction cup \varnothing 75 mm.
Tensile strenght over 45 kg.
Operating temperature from -5° to $+40^{\circ}$.


Black painted pickled sheet brackets th.3 mm.
RAL 9005



TIE 80

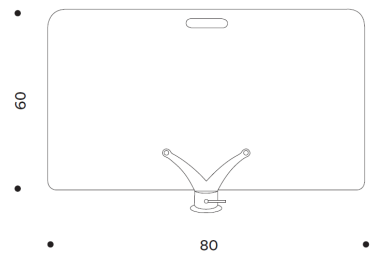

TIE 100

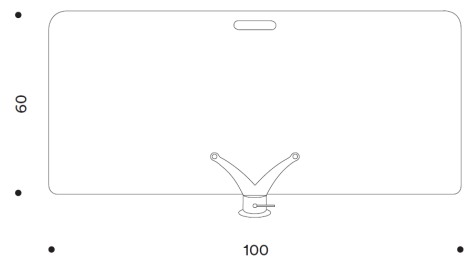


Durchsichtiges antibakterielles Methacrylat-Paneel St. 4 mm.

Griff 130x30 mm.


Lösehebel und Drehvorrichtung 180°.

Saugnapf schwarz
Durchmesser 75 mm, Zugfestigkeit über 45 kg,
Betriebstemperaturen von -5 bis +40 °C


Schwarze lackierte Stahlbügel, St. 3 mm
Schwarz RAL 9005.

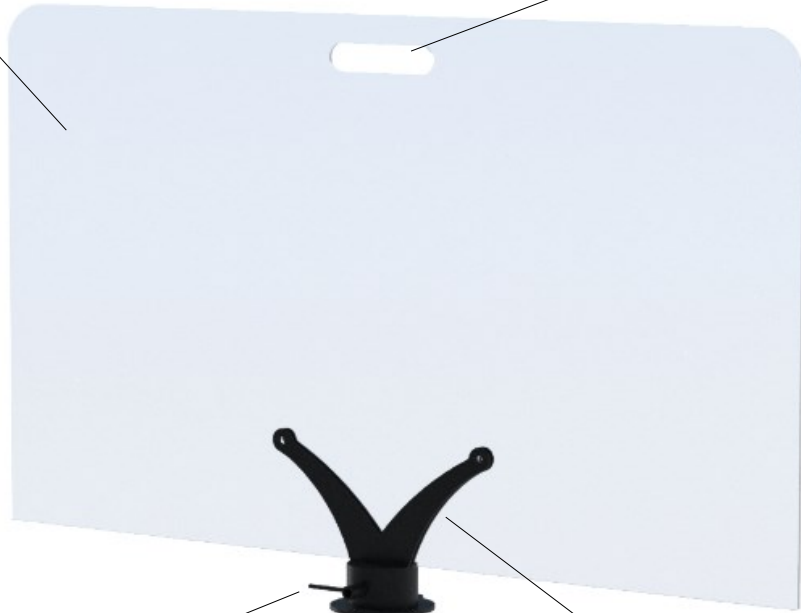

TIE 80

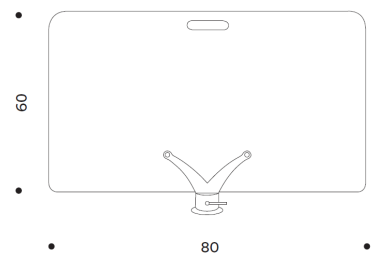

TIE 100

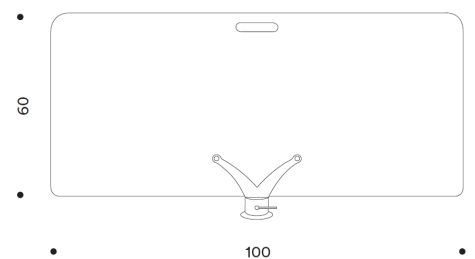

Panneau en méthacrylate transparent antibactérien ép. mm 4

Poignée 130x30 mm




Levier de détachement et fixation de rotation à 180 °

Ventouse noire diamètre mm 75,
résistance à la traction supérieure à Kg. 45,
températures de fonctionnement de - 5 à

Supports en tôle vernie noire, ép. mm 3.
Noir RAL 9005



TIE 80

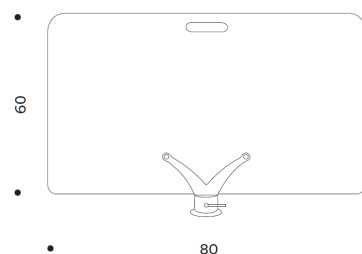

TIE 100

